



Manufactured from 100% Polypropylene Cord

High dirt holding capacity

Reduces sand, silt, rust and scale particles

#### **HYDRONIX SWC SERIES STRING WOUND CARTRIDGES**

A cost effective solution for the reduction of sand, silt, rust, dirt and scale particles. Made from 100% Polypropylene cord, SWC Series String Wound Cartridges can withstand temperatures of up to 165°F (73.9°C).

#### **HYDRONIX SWC SERIES STRING WOUND CARTRIDGES**

Are suitable for a variety of applications including residential and commercial applications using both municipal and well water. Different wound patterns for different micron ratings ensure that you are getting the right product for the right application.



# SWC SERIES

String Wound Cartridges

## 2.5" DIAMETER SPECIFICATIONS

| Part Number  | Description | Micron Rating |
|--------------|-------------|---------------|
| SWC-25-1001  | 2.5" x 10"  | 1             |
| SWC-25-1005  | 2.5" x 10"  | 5             |
| SWC-25-1010  | 2.5" x 10"  | 10            |
| SWC-25-1020  | 2.5" x 10"  | 20            |
| SWC-25-1030  | 2.5" x 10"  | 30            |
| SWC-25-1050  | 2.5" x 10"  | 50            |
| SWC-25-10100 | 2.5" x 10"  | 100           |
| SWC-25-2001  | 2.5" x 20"  | 1             |
| SWC-25-2005  | 2.5" x 20"  | 5             |
| SWC-25-2010  | 2.5" x 20"  | 10            |
| SWC-25-2020  | 2.5" x 20"  | 20            |
| SWC-25-2030  | 2.5" x 20"  | 30            |
| SWC-25-2050  | 2.5" x 20"  | 50            |
| SWC-25-20100 | 2.5" x 20"  | 100           |
| SWC-25-3001  | 2.5" x 30"  | 1             |
| SWC-25-3005  | 2.5" x 30"  | 5             |
| SWC-25-3010  | 2.5" x 30"  | 10            |
| SWC-25-3020  | 2.5" x 30"  | 20            |
| SWC-25-3030  | 2.5" x 30"  | 30            |
| SWC-25-3050  | 2.5" x 30"  | 50            |
| SWC-25-30100 | 2.5" x 30"  | 100           |
| SWC-25-4001  | 2.5" x 40"  | 1             |
| SWC-25-4005  | 2.5" x 40"  | 5             |
| SWC-25-4010  | 2.5" x 40"  | 10            |
| SWC-25-4020  | 2.5" x 40"  | 20            |
| SWC-25-4030  | 2.5" x 40"  | 30            |
| SWC-25-4050  | 2.5" x 40"  | 50            |
| SWC-25-40100 | 2.5" x 40"  | 100           |


## 4.5" DIAMETER SPECIFICATIONS

| Part Number  | Description | Micron Rating |
|--------------|-------------|---------------|
| SWC-45-1001  | 4.5" x 10"  | 1             |
| SWC-45-1005  | 4.5" x 10"  | 5             |
| SWC-45-1010  | 4.5" x 10"  | 10            |
| SWC-45-1020  | 4.5" x 10"  | 20            |
| SWC-45-1030  | 4.5" x 10"  | 30            |
| SWC-45-1050  | 4.5" x 10"  | 50            |
| SWC-45-10100 | 4.5" x 10"  | 100           |
| SWC-45-2001  | 4.5" x 20"  | 1             |
| SWC-45-2005  | 4.5" x 20"  | 5             |
| SWC-45-2010  | 4.5" x 20"  | 10            |
| SWC-45-2020  | 4.5" x 20"  | 20            |
| SWC-45-2030  | 4.5" x 20"  | 30            |
| SWC-45-2050  | 4.5" x 20"  | 50            |
| SWC-45-20100 | 4.5" x 20"  | 100           |

## Materials of Construction

Filter Media: Polypropylene Fiber Cord  
 Core: Polypropylene  
 Temperature Range: 40°F to 165°F (4.4°C to 73.9°C)

SWC Series Sediment Cartridges

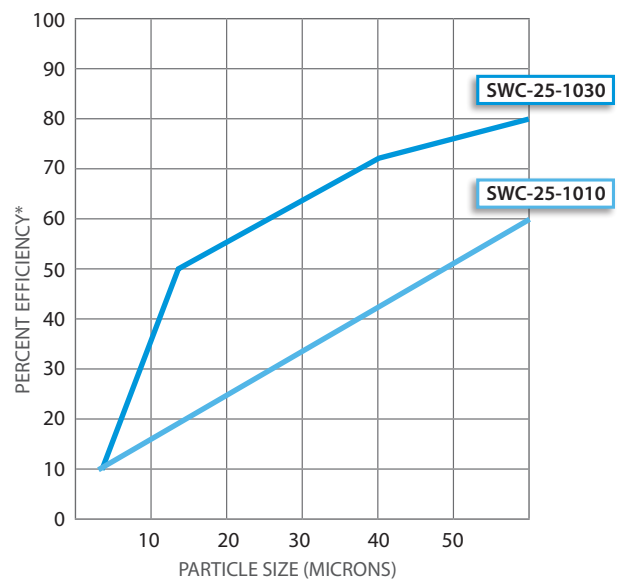

**WARNING:** Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

\* Special lengths and diameters available.

Distributed by:

## HYDRONIX WATER TECHNOLOGY

P.O. Box 2235 Chino Hills, CA 91709 | USA

sales@hydronixwater.com • www.HydronixWater.com