



1/2" Slim Line®  
High Temperature #20

1/2" Slim Line®  
High Temperature #10

3/4" Standard  
High Temperature #20

3/4" Standard  
High Temperature #10

## HIGH TEMPERATURE FILTER HOUSINGS

- Ideal for a wide range of industrial applications
- Excellent alternative to stainless and carbon steel vessels
- Durable glass-reinforced nylon construction

Constructed of glass-reinforced nylon. High Temperature filter housings are an economical alternative to stainless and carbon steel housings.

These 1/2" and 3/4" NPT housings can withstand temperatures up to a maximum of 160°F (71.1°C). Excellent chemical compatibility makes High Temperature housings an ideal choice for a wide variety of industrial applications including those involving organic solvents, sea water, alcohol, petroleum and vegetable oils. They should not be used with ketones.


A #241 Viton® o-ring provides dependable sealing. Both 10" and 20" lengths are available to accommodate flow rates up to 20 gpm (76 L/min.).



**PENTEK**  
FILTRATION

Pure Quality.™

# HIGH TEMPERATURE Filter Housings

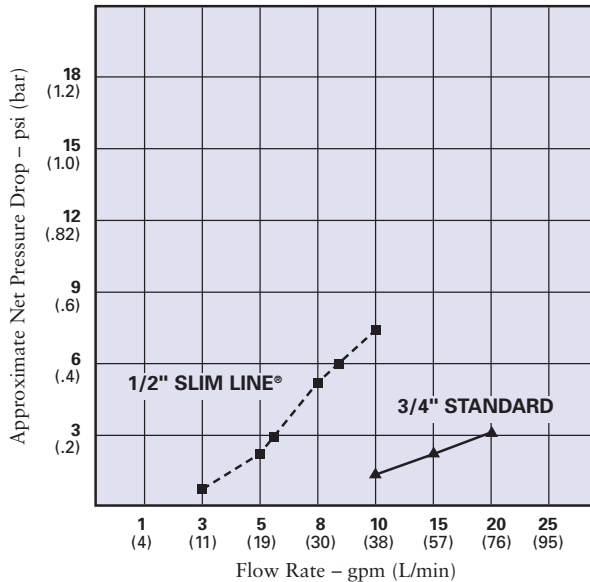

## Housing Specifications and Performance Data

Model	Maximum Dimensions	Initial ΔP (psi) @ Flow Rate (gpm)
#10, 3/4"	12-1/8" x 5-1/8" (308 mm x 130 mm)	<1 psi @ 8 gpm (< 0.1 bar @ 30 L/min)
#20, 3/4"	22-1/4" x 5-1/8" (565 mm x 130 mm)	<1 psi @ 8 gpm (< 0.1 bar @ 30 L/min)
#10 SL, 1/2"	11-3/4" x 4-3/8" (298 mm x 111 mm)	5 psi @ 8 gpm (< 0.4 bar @ 30 L/min)
#20 SL, 1/2"	21-7/8" x 4-3/8" (556 mm x 111 mm)	5 psi @ 8 gpm (< 0.4 bar @ 30 L/min)

## Materials of Construction

- **Housing** Glass-Reinforced Nylon
- **Cap** Glass-Reinforced Nylon
- **O-Ring** Viton®
- **Maximum Temperature** 160°F (71.1°C) (High Temperature)
- **Maximum Pressure** 125 psi (8.62 bar)

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.



502 Indiana Avenue • P.O. Box 1047 • Sheboygan, Wisconsin 53082-1047  
 Customer Service: 800-645-0267 • Fax: 888-203-7361 • supportspecialist@pentekfiltration.com  
 International: 920-457-9435 • Fax: 920-457-2417 • international@pentekfiltration.com  
[www.pentekfiltration.com](http://www.pentekfiltration.com)



Printed in U.S.A. 01/04 310054

