



- Manufactured from durable Polyester
- Washable and reusable
- Bacteria and chemical resistant

HYDRONIX SPC SERIES POLYESTER PLEATED CARTRIDGES

Are manufactured from durable polyester to provide you with a superior pleated cartridge that is washable, reusable and durable. Hydronix SPC Series Pleated Cartridges are bacteria and chemical resistant and provide great dirt holding capacity to extend the time between cartridge changes.

HYDRONIX SPC SERIES POLYESTER PLEATED CARTRIDGES

Can be used in residential, commercial and industrial applications. The Polyester media is pleated around a Polypropylene core for added strength and the ends are immersed in a thermosetting Vinyl Plastisol which fuses the three components together forming a unified end cap and gasket.

HYDRONIX SPC SERIES POLYESTER PLEATED CARTRIDGES

Are of a consistent and uniform quality and are unsurpassed in performance and value.



SPC SERIES

Polyester Pleated Cartridges

Materials of Construction

Filter Media: Non-woven Polyester
 End Caps: Vinyl Plastisol
 Core: Polypropylene
 Temperature Range: 40°F to 125°F (4.4°C to 51.7°C)

2.5" DIAMETER SPECIFICATIONS

Part Number	Description	Initial ΔP (psi) at Flow Rate (gpm)	Micron Rating Nominal
SPC-25-1001	2.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	1
SPC-25-1005	2.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	5
SPC-25-1010	2.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	10
SPC-25-1020	2.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	20
SPC-25-1030	2.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	30
SPC-25-1050	2.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	50
SPC-25-2001	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	1
SPC-25-2005	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	5
SPC-25-2010	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	10
SPC-25-2020	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	20
SPC-25-2030	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	30
SPC-25-2050	2.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	50

4.5" DIAMETER SPECIFICATIONS

Part Number	Description	Initial ΔP (psi) at Flow Rate (gpm)	Micron Rating Nominal
SPC-45-1001	4.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	1
SPC-45-1005	4.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	5
SPC-45-1010	4.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	10
SPC-45-1020	4.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	20
SPC-45-1030	4.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	30
SPC-45-1050	4.5" x 9 7/8"	1 psi at 10 gpm (.1 bar at 38 L/min)	50
SPC-45-2001	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	1
SPC-45-2005	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	5
SPC-45-2010	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	10
SPC-45-2020	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	20
SPC-45-2030	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	30
SPC-45-2050	4.5" x 20"	1 psi at 20 gpm (.1 bar at 76 L/min)	50

SPC Series Flow Rates

Microns	2.5" x 10"	2.5" x 20"	4.5" x 10"	4.5" x 20"
1	4	8	15	25
5	7	14	15	25
10	7	14	15	25
20	8	16	15	25
30	8	16	15	25
50	10	20	15	25


Flow Rates in GPMs

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.


HYDRONIX WATER TECHNOLOGY

P.O. Box 927, Chino Hills, CA 91709 USA
 sales@hydronixwater.com • www.HydronixWater.com

SPC Performance

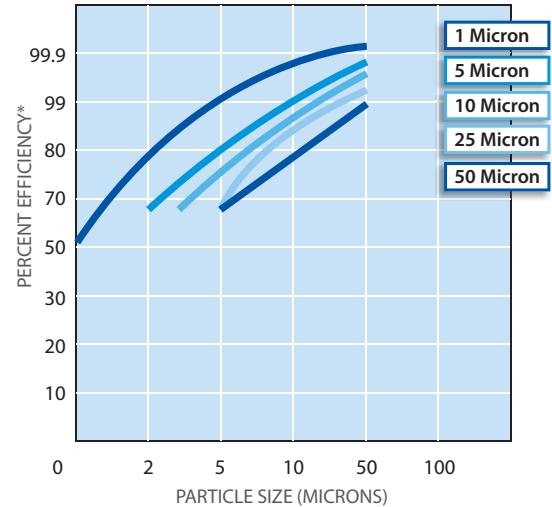

SPC Performance

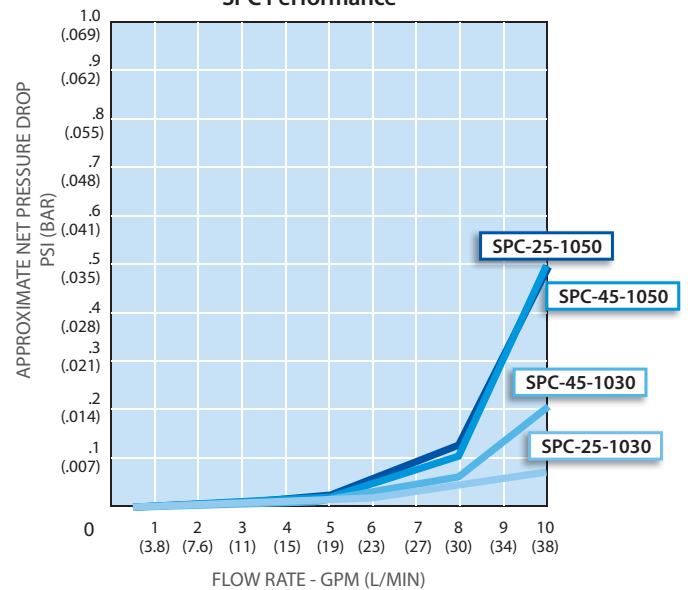

Distributed by: